



ASUS TUF Gaming AS1000 1 TB USB Type-C 3.2 Gen 2 (3.1 Gen 2) Black

Brand : ASUS **Product family:** TUF Gaming **Product code:** 90DD02Q0-M09000

Product name : AS1000


- Ultrafast transfer speed: M.2 NVMe PCIe SSD and USB-C 3.2 Gen 2x1 interface delivers up to 10 Gbps file transfers — 10X faster than conventional external HDDs*
 - Military-grade toughness and durability: Meets MIL-STD-810H drop resistance** and IP68 water-and-dust resistance standards***
 - Exceptional cooling: Aluminum alloy chassis and a thermal pad enable effective heat dissipation for stable data transmission and longer SSD lifespan
 - Complete data protection: Bundled NTI Backup Now EZ software (Up to US\$35.99 in value) for hassle-free data backup
 - Easy drive management: Intuitive SSD Dashboard to view parameters like SSD temperature, storage status, and more
 - Wide-ranging compatibility: Includes a USB-C cable to connect to PCs, laptops, mobile devices, and the latest gaming consoles
- USB-C 3.2 Gen 2x1 portable M.2 NVMe PCIe SSD 1 TB, MIL-STD-810H drop resistance, IP68 water and dust resistance, aluminum alloy chassis with a thermal pad, Bundled NTI Backup Now EZ, PS5 and Xbox support



Solid state drive		Security	
SSD form factor	M.2	Password protection *	✗
Interface	USB 3.2 Gen 2 (3.1 Gen 2)	International Protection (IP) code	IP68
SSD capacity *	1 TB	Power	
NVMe *	✓	Operating voltage	5 V
Read speed *	10000 MB/s	Operational conditions	
Write speed *	10000 MB/s	Operating temperature (T-T)	0 - 40 °C
Ports & interfaces		Storage temperature (T-T)	-40 - 60 °C
Thunderbolt technology *	✗	Operating relative humidity (H-H)	15 - 90%
USB connector *	USB Type-C	Storage relative humidity (H-H)	10 - 90%
USB version *	3.2 Gen 2 (3.1 Gen 2)	Weight & dimensions	
Wi-Fi *	✗	Width	54 mm
Data transfer rate	10 Gbit/s	Depth	13 mm
Features		Height	125 mm
Housing material *	Aluminium	Weight	157 g
Product colour *	Black	Packaging data	
Protection features	Drop resistant, Dust resistant, Shock resistant, Water resistant	Package width	178 mm
Windows operating systems supported	Windows 10, Windows 11	Package depth	99 mm
Mac operating systems supported	✓	Package height	39 mm
Mobile operating systems supported	Android	Package weight	334 g
Security		Packaging content	
Hardware encryption *	✗	Quick start guide	✓
		Manual	✓



4711387197165

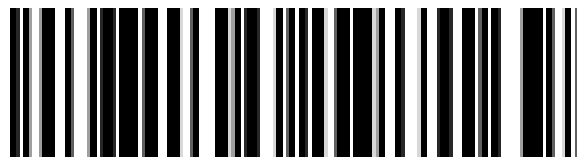

0197105197169



197105197169

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 27-OCT-2024. Prints or copies of Information are only valid on the printed Publication date